

Very high temperature self-regulating heating cable.

FailSafe Super Inherently Temperature-Safe Heating Cable

- 225°C exposure temperature withstand, (energised or switched off).
- *Inherently temperature-safe. (ITS)*
- High power outputs to 75W/m at 10°C
- External temperature controls not necessary.

DESCRIPTION

FSS is a very high temperature self-regulating heating cable, having an exposure limit of 225°C, energised or not.

It may be provided with a continuous extruded metal jacket for applications where high mechanical strength is required or a metal braid where flexibility is preferred.

The continuous metal outer jacket is ductile, yet withstands high mechanical loads, thus averting damage when being installed in arduous environments.

Easy terminations, cut-to-length.


Safest ever self-regulating product range for very high temperature exposure; will not overheat even when exposed to 225°C when energised or switched off as it is *inherently temperature-safe*.

ATEX/ IECEx Approved

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Similar competitor self-regulating products are typically limited to a maximum energised temperature, typically 120°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

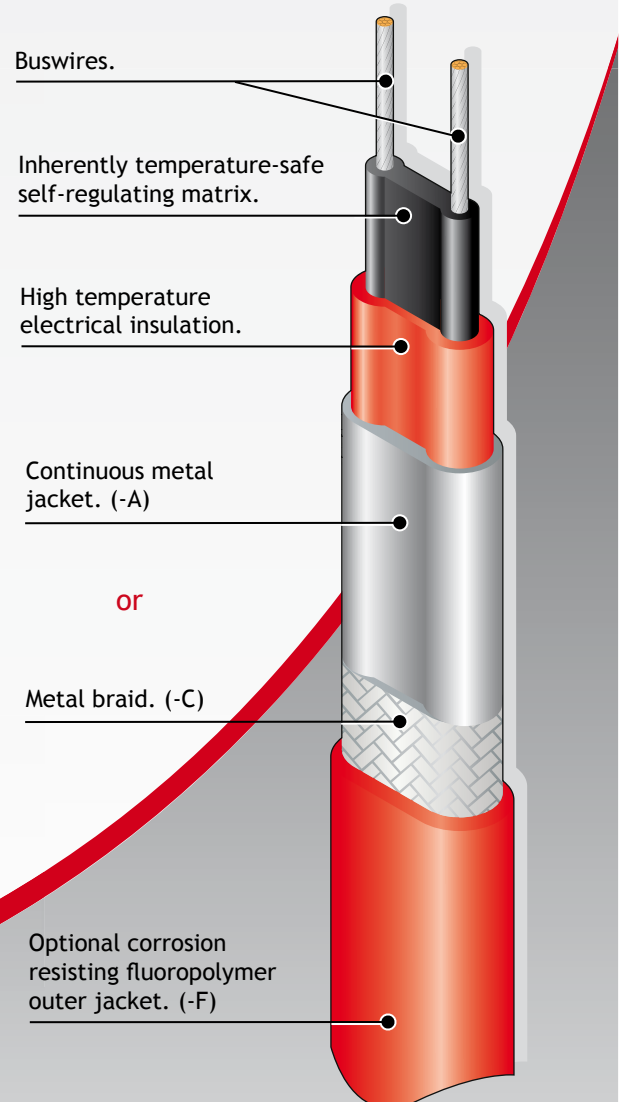

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE TEMPERATURE: 225°C (437°F)
(ENERGISED OR SWITCHED OFF)

MINIMUM OPERATING TEMPERATURE: -65°C* (-85°F)

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 1 - 277V AC
(other voltages available on request)

TEMPERATURE CLASSIFICATION:
up to 75W/m @ nom 230V powered to 277V - T3 (200°C)
>75W/m @ nom 230V powered to 277V - T2 (300°C)

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/-0.5	Weight kg/100m	Min Bending radius	Gland size
FSS-A	12.25 x 6.05	13.7	50mm	M20
FSS-AF	13.15 x 6.95	17.4	50mm	M20
FSS-C	10.55 x 4.35	10.4	30mm	M20
FSS-CF	11.45 x 5.25	13.4	35mm	M20

APPROVAL DETAILS:

ATEX - Sira 02ATEX3072
IECEX - SIR 11.0120
EAC* - TC RU C-GB.ГБ05.В.00186
FM - 3009080

ORDERING INFORMATION:

Example; 30 FSS 2 - A or C option F

Output 30w/m at 10°C
FSS Heating Cable
Supply Voltage 220 - 240V AC
Continuous Outer jacket
Metal Braid
Outer Sheath, Fluoropolymer

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Installation, Maintenance and Testing Manual (HTDIMM 010) for further details.

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:
The following circuit details relate specifically for the trace heating of pipework and equipment. For any other application consult Heat Trace.

Cat Reference	Start-up Temperature	230V			
		10A	16A	20A	32A
15FSS	10°C	76	122	154	154
	0°C	70	112	140	146
	-20°C	62	98	122	138
	-40°C	52	82	102	126
30FSS	10°C	52	82	102	108
	0°C	46	74	92	104
	-20°C	40	66	82	98
	-40°C	30	50	62	88
45FSS	10°C	38	62	76	88
	0°C	32	52	66	84
	-20°C	24	38	46	76
	-40°C	14	24	28	46
60FSS	10°C	24	38	46	76
	0°C	18	30	36	58
	-20°C	12	20	26	42
	-40°C	8	12	16	24
75FSS	10°C	14	24	28	46
	0°C	12	18	22	36
	-20°C	8	12	16	24
	-40°C	4	8	10	14

For use with Type C circuit breakers to IEC 60898.

THERMAL RATINGS:

Nominal output at 230V when FSS is installed on thermally insulated carbon steel pipes. For 75W/m and above, the use of aluminium overfoiling is strongly recommended to optimise the thermal transmission to the pipe and achieve the stated thermal ratings.

